

DESCRIPTION

- Brass construction
- Flexible supply lines with 3/8" fittings
- Includes Red/Blue indicators


CARTRIDGE

- Ceramic disk cartridge

STANDARDS


- ADA  for lever handle

Specifications

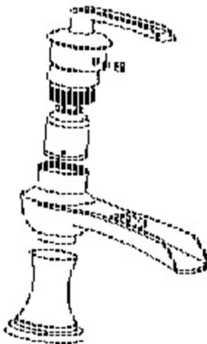

Single-Handle Lavatory Faucet



NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE/3 HOLES.

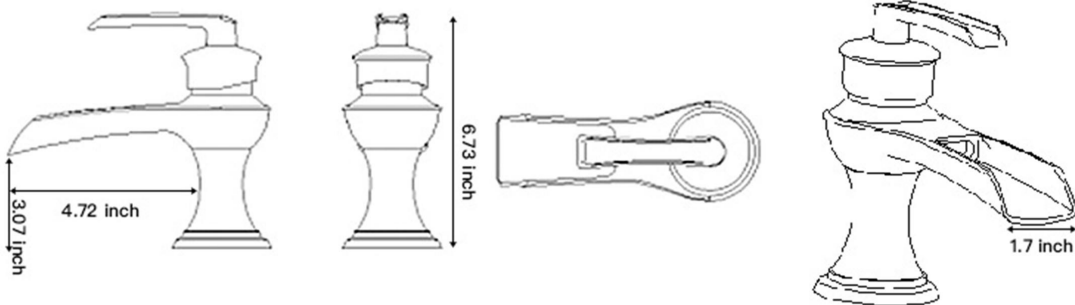

CRITICAL DIMENSIONS

Single-Handle Lavatory Faucet Installation

INSTALLATION MANUAL Tools You Will Need :




Adjustable wrench Hexagon wrench wrench glasses

Notes before installation :


- 1.Please check that all components are present.
- 2.Before installation ensure that all feed lines are clear of debris and on/off valve is present.
- 3.Ensure water pressure is between 20-125 PSI (includes combination of hot and cold feed lines).
- 4.Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
- 5.If you will be away from home for an extended period you should shut off the main water supply.

Daily maintenance


- 1.Use a soft cloth and vinegar to remove hard-water spots.
- 2.Check aerator (if present) regularly for calcium build up are when water stream is not optimum.
- 3.DO NOT use caustic cleaning products as the use will break down finish and will void the product warranty.
- 4.Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.
- 5.If the water pressure appears to be less than optimum remove, inspect,clean or replace aerator.




1. Remove the rubber washer,metal washer and locking nut from the faucet.



2. Screw and hand tighten the hot and cold flexible hoses to the faucet.DO NOT use a wrench to tighten hoses as this may damage the hose and/or the hose threads.



3. Install faucet through center hole .



4. Re-install the rubber washer followed by the metal washer and lock-nut.Hand tighten then tighten further using a screw driver to tighten lock-nut screws.


Warning



NO TAPE NEEDED FOR INSTALLATION

Run the hot and cold valve at least 15 seconds to clear it before connect


Noise could be significantly reduced by adjusting the valve water flow




5.Attach flexible hose to water supply.

1-1 Installation Sketch

With Overflow

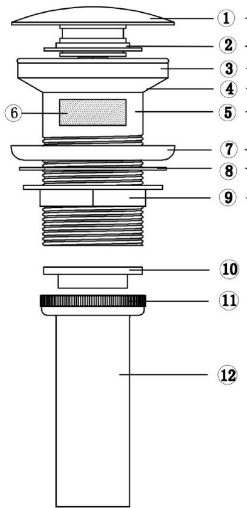

Without Overflow

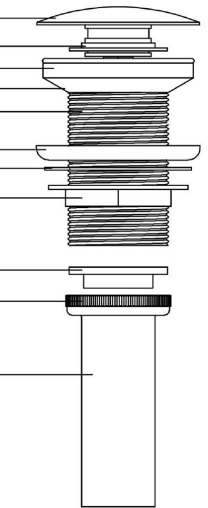

① Drain Cap

② Silicon Gasket

③ Sponge Gasket

④ Silicon Gasket

⑤ Drain Body

⑥ Overflow

⑦ Silicon Gasket

⑧ Plastic Washer

⑨ Brass Locking Nut


⑩ Rubber Gasket

⑪ Locking Nut

⑫ Tail Pipe


1-2 Installation Steps

Vessel Sink/Drain Installation(Overflow)

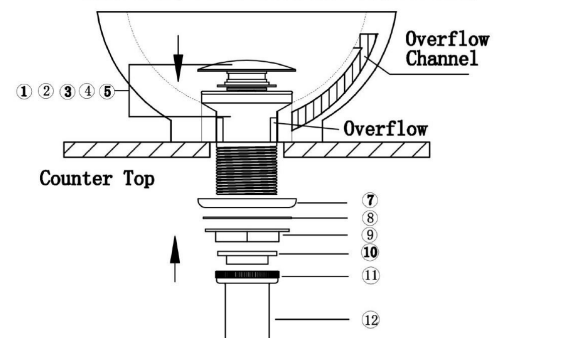

Installation as shown in the figure

Vessel Sink/Drain Installation(non-Overflow)

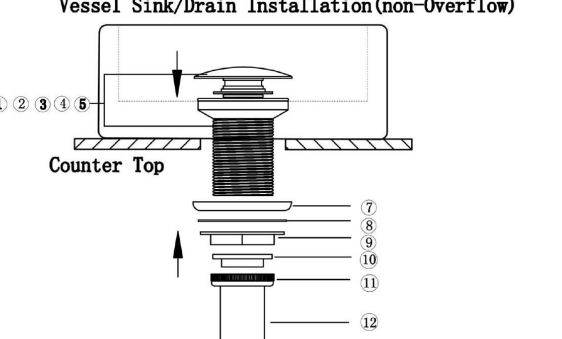

Installation as shown in the figure